


New South Wales.

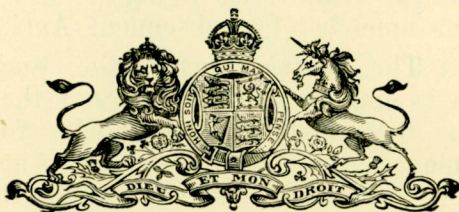

ANNO QUARTO

GEORGII VI REGIS.

Act No. 18, 1940

An Act to sanction and to provide for the carrying out of works for the improvement of the dam across the Murrumbidgee River known as the Burrinjuck Dam; and for purposes connected therewith. [Assented to, 30th May, 1940.]

BE it enacted by the King's Most Excellent Majesty, by and with the advice and consent of the Legislative Council and Legislative Assembly of New South Wales in Parliament assembled, and by the authority of the same, as follows:—

1. This Act may be cited as the "Burrinjuck Dam Short title. Improvement Act, 1940."

Burrinjuck Dam Improvement.

Commence-
ment.

2. This Act shall be deemed to have commenced on the first day of July, one thousand nine hundred and thirty-seven.

Work
sanctioned.

3. (1) (a) The carrying out of the work described in the Schedule to this Act is hereby sanctioned.

(b) The said work shall be deemed to be an authorised work within the meaning of the Public Works Act, 1912, as amended by subsequent Acts.

(c) The Water Conservation and Irrigation Commission is empowered to carry out the said work, and shall be the constructing authority for the same within the meaning of the said Act as so amended, and shall enter into such contracts and take all such necessary steps for the proper execution thereof as such authority may think proper.

(d) The provisions of the Public Works Act, 1912, as amended by subsequent Acts, sections thirty-four, thirty-five, thirty-six and thirty-seven excepted, shall apply to and in respect of the said work.

(2) Without prejudice to the generality of subsection one of this section the provisions of section thirty-eight of the Public Works Act, 1912, as amended by subsequent Acts, shall apply to and in respect of any contracts referred to in paragraph (c) of subsection one of this section.

Estimated
cost.

4. The cost of carrying out the said work is estimated at one million eight hundred and fifty thousand pounds, and such estimated cost shall not, under any circumstances, be exceeded by more than ten per centum.

Burrinjuck Dam Improvement.

SCHEDULE.

Sec. 3.

The carrying out of the following work in connection with the dam across the Murrumbidgee River known as the Burrinjuck Dam, viz.:—

(1) SPILLWAYS.

The capacity of the present discharge arrangements of the dam to be increased by providing two gate openings on the northern side and one gate opening on the southern side of the main dam, such openings to be provided with tilting gates. The present spillway channels to be deepened and widened and provided with new side walls. The crest of the present spillway weirs to be raised by 5 feet and the concrete in the existing walls to be given surface treatment to minimize percolation of water.

(2) WATERTIGHT CUT-OFF AND DRAINAGE.

A watertight cut-off, consisting of an asphalt diaphragm, to be placed within the dam from the foundation up to such level as may be decided and on the upstream face above this elevation, the two parts being connected horizontally. Access to the interior of the dam to be obtained by adits on the downstream face connecting to horizontal galleries in the dam proper. A drainage gallery in the rock below the foundation of the dam and along its periphery to be provided, together with such vertical shafts as are necessary.

(3) STABILISATION.

Stabilisation of the main dam to be provided for by adding concrete to the back and top thereof.

(4) OUTLETS.

The sluice outlets situated in the pier at the southern extremity of the dam to be removed and the sluice rebuilt in the southern spillway wall, the shafts to other sluices and the sluice outlets to be lined with steel plates.


(5) MODIFICATIONS.

The whole of the work hereinbefore described to be subject to such modifications as may be deemed desirable by the Constructing Authority.

By Authority:

THOMAS HENRY TENNANT, Government Printer, Sydney, 1940.

[3d.]

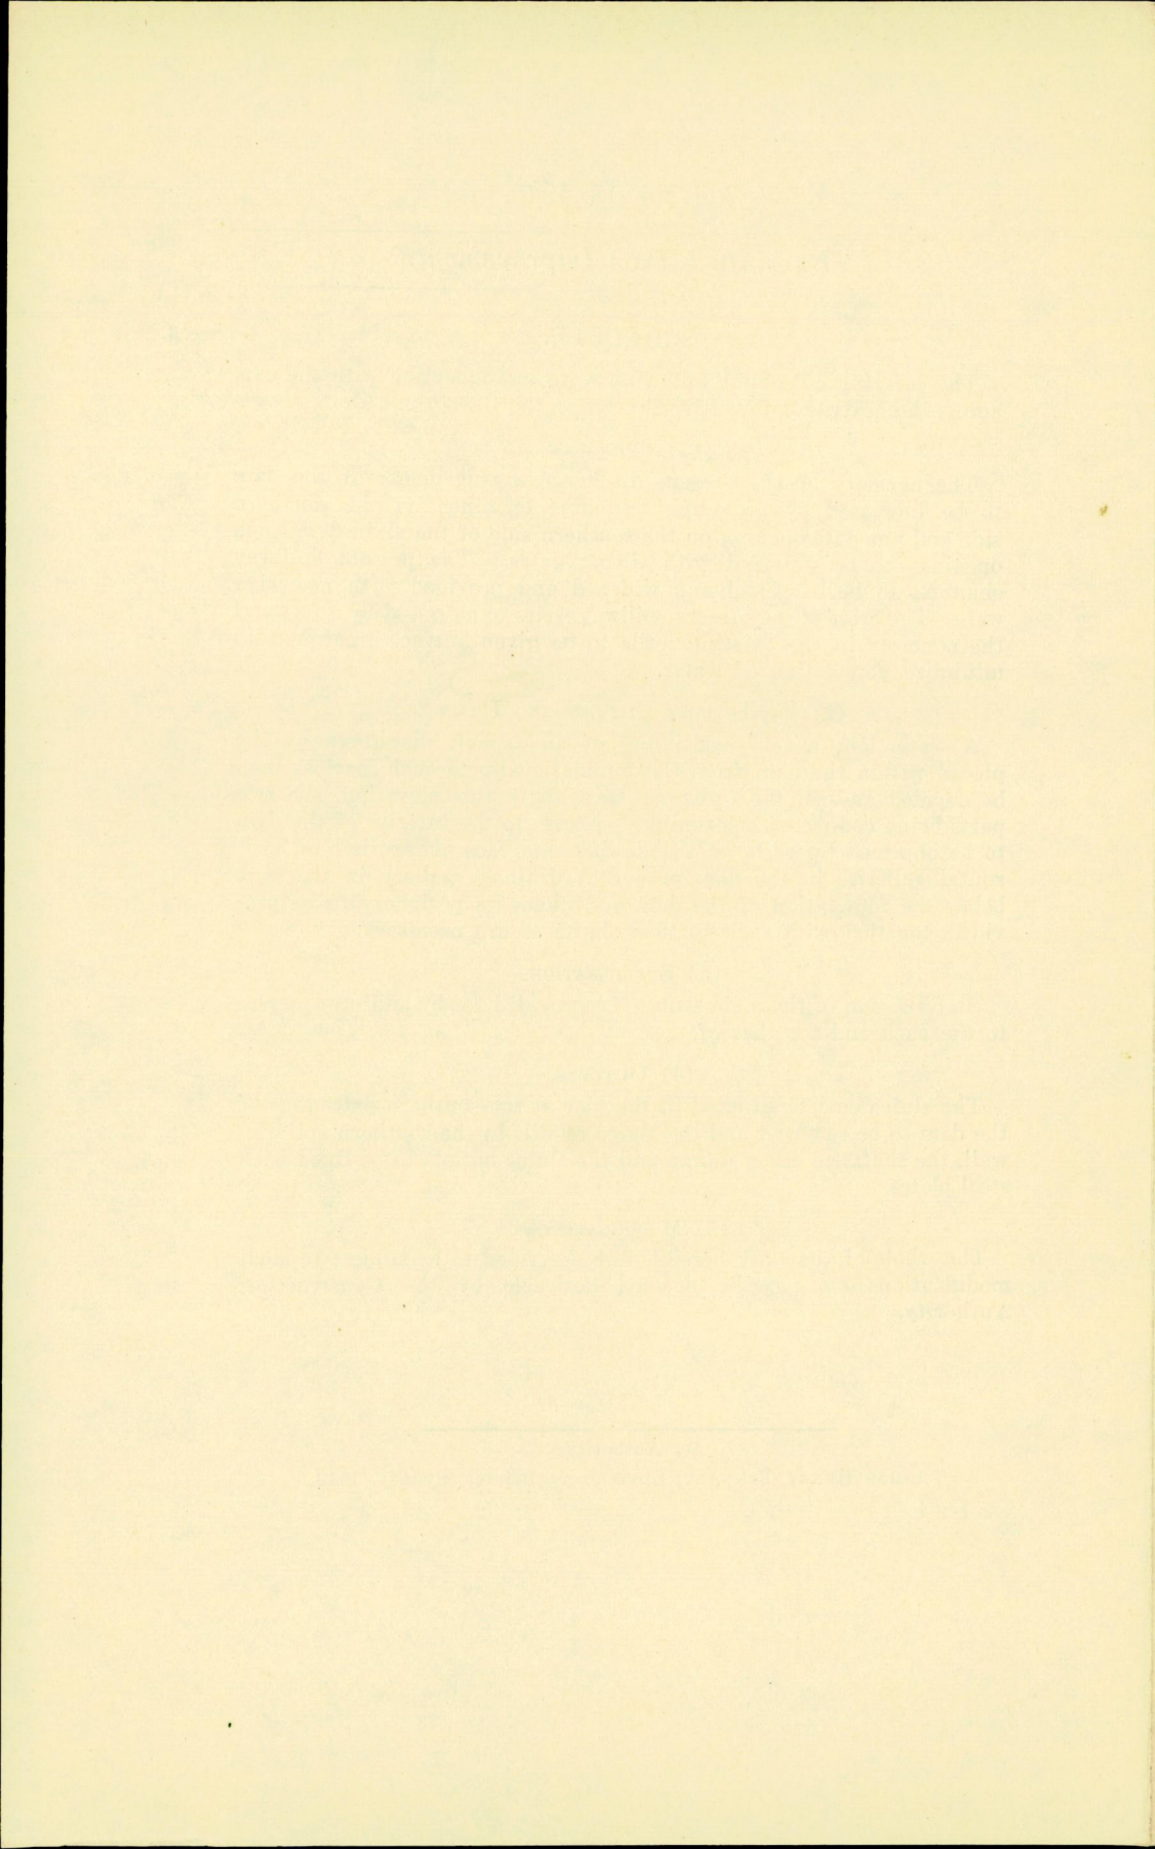

I certify that this PUBLIC BILL, which originated in the LEGISLATIVE ASSEMBLY, has finally passed the LEGISLATIVE COUNCIL and the LEGISLATIVE ASSEMBLY of NEW SOUTH WALES.

W. R. McCOURT,
Clerk of the Legislative Assembly.

*Legislative Assembly Chamber,
Sydney, 23 May, 1940.*

New South Wales.



ANNO QUARTO

GEORGII VI REGIS.

Act No. 18, 1940.

An Act to sanction and to provide for the carrying out of works for the improvement of the dam across the Murrumbidgee River known as the Burrinjuck Dam; and for purposes connected therewith. [Assented to, 30th May, 1940.]

BE it enacted by the King's Most Excellent Majesty, by and with the advice and consent of the Legislative Council and Legislative Assembly of New South Wales in Parliament assembled, and by the authority of the same, as follows:—

1. This Act may be cited as the "Burrinjuck Dam short title. Improvement Act, 1940."

2.

I have examined this Bill, and find it to correspond in all respects with the Bill as finally passed by both Houses.

W. W. HEDGES,
Chairman of Committees of the Legislative Assembly.

Burrinjuck Dam Improvement.

Commence-
ment.

2. This Act shall be deemed to have commenced on the first day of July, one thousand nine hundred and thirty-seven.

Work
sanctioned.

3. (1) (a) The carrying out of the work described in the Schedule to this Act is hereby sanctioned.

(b) The said work shall be deemed to be an authorised work within the meaning of the Public Works Act, 1912, as amended by subsequent Acts.

(c) The Water Conservation and Irrigation Commission is empowered to carry out the said work, and shall be the constructing authority for the same within the meaning of the said Act as so amended, and shall enter into such contracts and take all such necessary steps for the proper execution thereof as such authority may think proper.

(d) The provisions of the Public Works Act, 1912, as amended by subsequent Acts, sections thirty-four, thirty-five, thirty-six and thirty-seven excepted, shall apply to and in respect of the said work.

(2) Without prejudice to the generality of subsection one of this section the provisions of section thirty-eight of the Public Works Act, 1912, as amended by subsequent Acts, shall apply to and in respect of any contracts referred to in paragraph (c) of subsection one of this section.

Estimated
cost.

4. The cost of carrying out the said work is estimated at one million eight hundred and fifty thousand pounds, and such estimated cost shall not, under any circumstances, be exceeded by more than ten per centum.

SCHEDULE

Burrinjuck Dam Improvement.

SCHEDULE.

Sec. 3.

The carrying out of the following work in connection with the dam across the Murrumbidgee River known as the Burrinjuck Dam, viz.:—

(1) SPILLWAYS.

The capacity of the present discharge arrangements of the dam to be increased by providing two gate openings on the northern side and one gate opening on the southern side of the main dam, such openings to be provided with tilting gates. The present spillway channels to be deepened and widened and provided with new side walls. The crest of the present spillway weirs to be raised by 5 feet and the concrete in the existing walls to be given surface treatment to minimize percolation of water.

(2) WATERTIGHT CUT-OFF AND DRAINAGE.

A watertight cut-off, consisting of an asphalt diaphragm, to be placed within the dam from the foundation up to such level as may be decided and on the upstream face above this elevation, the two parts being connected horizontally. Access to the interior of the dam to be obtained by adits on the downstream face connecting to horizontal galleries in the dam proper. A drainage gallery in the rock below the foundation of the dam and along its periphery to be provided, together with such vertical shafts as are necessary.

(3) STABILISATION.

Stabilisation of the main dam to be provided for by adding concrete to the back and top thereof.

(4) OUTLETS.

The sluice outlets situated in the pier at the southern extremity of the dam to be removed and the sluice rebuilt in the southern spillway wall, the shafts to other sluices and the sluice outlets to be lined with steel plates.

(5) MODIFICATIONS.

The whole of the work hereinbefore described to be subject to such modifications as may be deemed desirable by the Constructing Authority.

In the name and on behalf of His Majesty I assent to this Act.

WAKEHURST,
Governor.

*Government House,
Sydney, 30th May, 1940.*

THE UNIVERSITY OF CHICAGO
LIBRARY

1911

1911

1911

1911

1911

1911

1911

1911

This PUBLIC BILL originated in the LEGISLATIVE ASSEMBLY, and, having this day passed, is now ready for presentation to the LEGISLATIVE COUNCIL for its concurrence.

W. R. McCOURT,
Clerk of the Legislative Assembly.
Legislative Assembly Chamber,
Sydney, 16 May, 1940.

New South Wales.



ANNO QUARTO

GEORGI VI REGIS.

Act No. , 1940.

An Act to sanction and to provide for the carrying out of works for the improvement of the dam across the Murrumbidgee River known as the Burrinjuck Dam; and for purposes connected therewith.

BE it enacted by the King's Most Excellent Majesty, by and with the advice and consent of the Legislative Council and Legislative Assembly of New South Wales in Parliament assembled, and by the authority of the same, as follows:—

1. This Act may be cited as the "Burrinjuck Dam Short title. Improvement Act, 1940."

Burrinjuck Dam Improvement.

2. This Act shall be deemed to have commenced on the first day of July, one thousand nine hundred and thirty-seven. Commencement.

3. (1) (a) The carrying out of the work described in the Schedule to this Act is hereby sanctioned. Work sanctioned.

(b) The said work shall be deemed to be an authorised work within the meaning of the Public Works Act, 1912, as amended by subsequent Acts.

(c) The Water Conservation and Irrigation Commission is empowered to carry out the said work, and shall be the constructing authority for the same within the meaning of the said Act as so amended, and shall enter into such contracts and take all such necessary steps for the proper execution thereof as such authority may think proper.

(d) The provisions of the Public Works Act, 1912, as amended by subsequent Acts, sections thirty-four, thirty-five, thirty-six and thirty-seven excepted, shall apply to and in respect of the said work.

20 (2) Without prejudice to the generality of subsection one of this section the provisions of section thirty-eight of the Public Works Act, 1912, as amended by subsequent Acts, shall apply to and in respect of any contracts referred to in paragraph (c) of subsection one
25 of this section.

4. The cost of carrying out the said work is estimated at one million eight hundred and fifty thousand pounds, and such estimated cost shall not, under any circumstances, be exceeded by more than ten per centum. Estimated cost.

SCHEDULE

Burrinjuck Dam Improvement.

SCHEDULE.

Sec. 8.

The carrying out of the following work in connection with the dam across the Murrumbidgee River known as the Burrinjuck Dam, viz.:—

(1) SPILLWAYS.

- 5 The capacity of the present discharge arrangements of the dam to be increased by providing two gate openings on the northern side and one gate opening on the southern side of the main dam, such openings to be provided with tilting gates. The present spillway channels to be deepened and widened and provided with new side
10 walls. The crest of the present spillway weirs to be raised by 5 feet and the concrete in the existing walls to be given surface treatment to minimize percolation of water.

(2) WATERTIGHT CUT-OFF AND DRAINAGE.

- A watertight cut-off, consisting of an asphalt diaphragm, to be
15 placed within the dam from the foundation up to such level as may be decided and on the upstream face above this elevation, the two parts being connected horizontally. Access to the interior of the dam to be obtained by adits on the downstream face connecting to horizontal galleries in the dam proper. A drainage gallery in the rock
20 below the foundation of the dam and along its periphery to be provided, together with such vertical shafts as are necessary.

(3) STABILISATION.

Stabilisation of the main dam to be provided for by adding concrete to the back and top thereof.

(4) OUTLETS.

- 25 The sluice outlets situated in the pier at the southern extremity of the dam to be removed and the sluice rebuilt in the southern spillway wall, the shafts to other sluices and the sluice outlets to be lined with steel plates.

(5) MODIFICATIONS.

- 30 The whole of the work hereinbefore described to be subject to such modifications as may be deemed desirable by the Constructing Authority.

