

Document tendered by
 Mr Jim Pinkerton
 Received by
 Gareth Perkins
 Date: 29 / 10 / 25
 Resolved to publish Yes / No

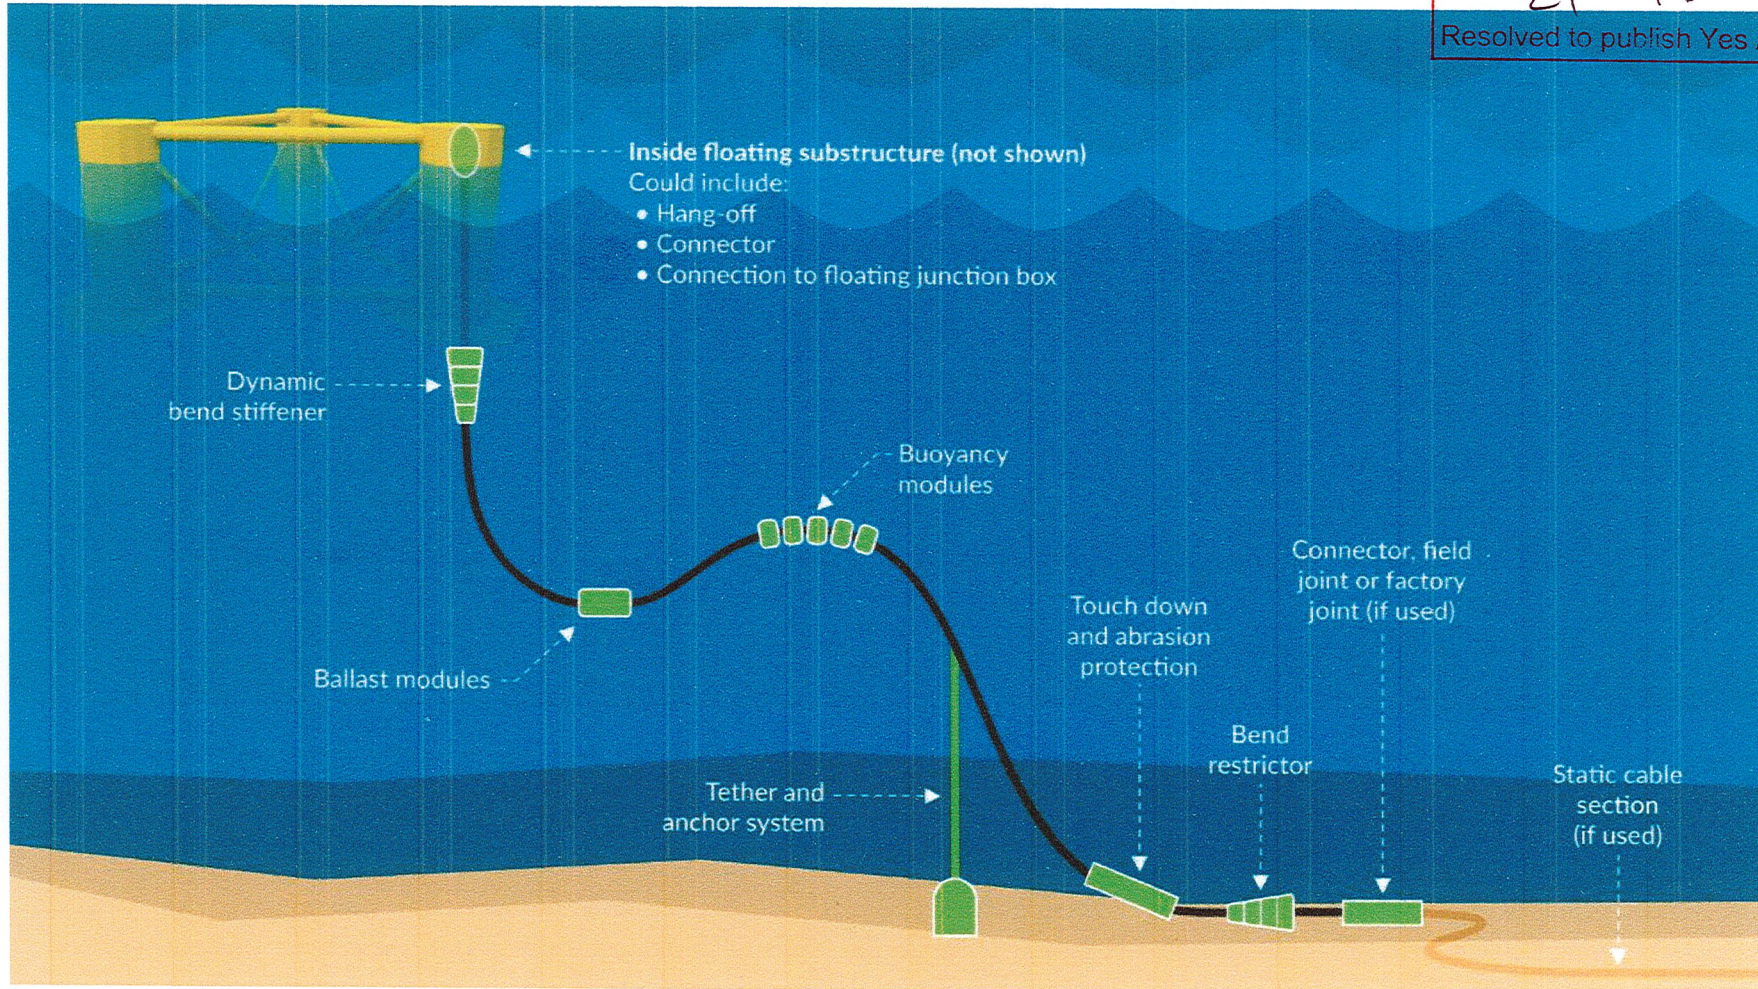


Figure 16 Floating offshore wind dynamic cable system. An actual system would not use all of these elements at the same time. The horizontal distance between the floating substructure and the touchdown point is typically around 200 m. *Image courtesy of BVG Associates. All rights reserved.*